



# EVIAN TUBE<sup>™</sup> PENDANT

Interior Ambient LED Luminaire

Client: \_\_\_\_\_ Order #: \_\_\_\_\_  
Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Qty: \_\_\_\_\_

### Performance Data

CRI

90+

CCT

2700K, 3000K, 3500K, 4000K

### Projected Lifetime

100,000+ Hours (L70)

### Dimming


1% Dimming Standard

### Operating Temperature

-40°C to +50°C Ambient

### Warranty

5 year Standard  
10 year Optional

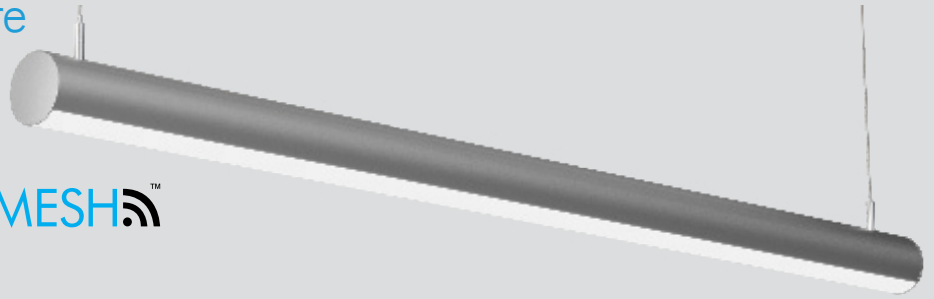

<b>USA</b> Buy American Act Compliant	<b>10 Yr</b> Warranty Available
---	---------------------------------------

### Description

The redesigned Evian Tube is a sleek interior LED luminaire designed to complement the open, minimalist look of modern interior spaces. Featuring a sturdy, extruded aluminum housing, the Evian Tube is a specification-grade luminaire delivering quality illumination through its high-end diffuser lens. The Evian Tube is ideal for commercial, retail, and architectural spaces in both new construction and renovation applications.


### Features

#### PERFORMANCE

- Delivers up to 1,200 lm/ft at 4000K
- 90+ CRI for accurate interior color rendering
- R9 value of 60+
- Power Factor > 0.90; THD < 20%

#### PHYSICAL

- Housing: 2.5" diameter extruded T5-6063 Aluminum with a clear anodized finish
- Housing features an internal integrated screw port for mounting drivers, controllers (for color tuning), end caps, and continuous run joiner hardware
- Lens: extruded acrylic blend with 80% transmissivity, designed with a snap-fit into the housing
- End caps: powder coated die-cast ADC aluminum; fastened to the housing with an internal galvanized steel pull bracket
- Mounting: pendant

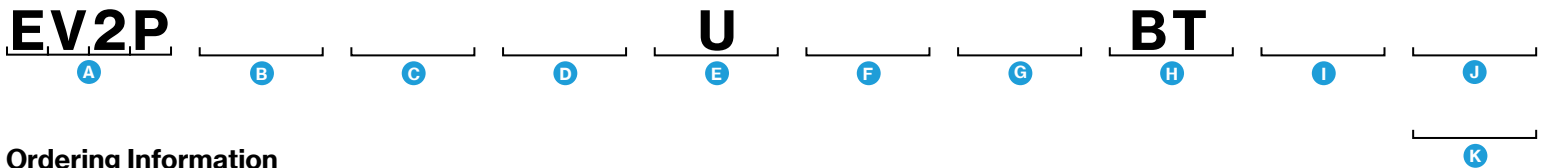

### Ordering Information

#### A FIXTURE SERIES

EV2P Evian Tube Pendant

#### B LENGTH

2	2'
3	3'
4	4'
6	6'
8	8'

#### C OUTPUT

L	6W/ft
M	10W/ft
H	12W/ft

#### D CCT

27	2700K
30	3000K
35	3500K
40	4000K

#### E VOLTAGE

U 120-277V

#### F MOUNTING

CA	24" Aircraft cable
CB	48" Aircraft cable
CD	60" Aircraft cable
CF	72" Aircraft cable
CG	96" Aircraft cable

#### G FINISH

B	Black
S	Silver <sup>2</sup>
W	White
C	Custom

#### H OPTIONS

BT Bluetooth DECO Mesh<sup>TM3</sup>

#### I OPTIONS

E Emergency

#### J RUN<sup>1</sup>

—	Standalone
A	First of Run
B	Mid of Run
BP	Mid of Run - Powerfeed
C	End of Run

#### K WARRANTY<sup>3</sup>

-	5 Year Warranty
10	10 Year Warranty
10L	10 Year Warranty including labor


<sup>1</sup> See Continuous Run Guide for additional information (separate document)

<sup>2</sup> Standard

<sup>3</sup> 1% Dimming when ordered with Bluetooth

<sup>4</sup> 5 Year Warranty is Standard unless specified

**Dimensions**

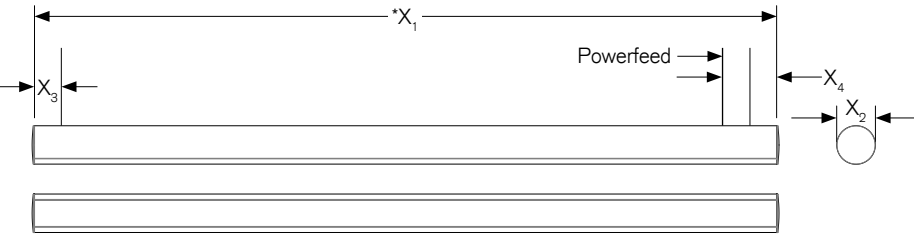


	Inches				
	Size 2'	Size 3'	Size 4'	Size 6'	Size 8'
<b>X<sub>1</sub></b>	24.00	36.00	48.00	72.00	96.00
<b>*X<sub>1</sub></b>	24.06	36.06	48.06	72.06	96.06
<b>X<sub>2</sub></b>	Ø2.50	Ø2.50	Ø2.50	Ø2.50	Ø2.50
<b>X<sub>3</sub></b>	1.75	1.75	1.75	1.75	1.75
<b>X<sub>4</sub></b>	3.00	3.00	3.00	3.00	3.00

X<sub>1</sub> = For B, BP, and C housings  
 \*X<sub>1</sub> = For Standalone and A housings

**Photometrics**

Model 4' Low Output 4000K

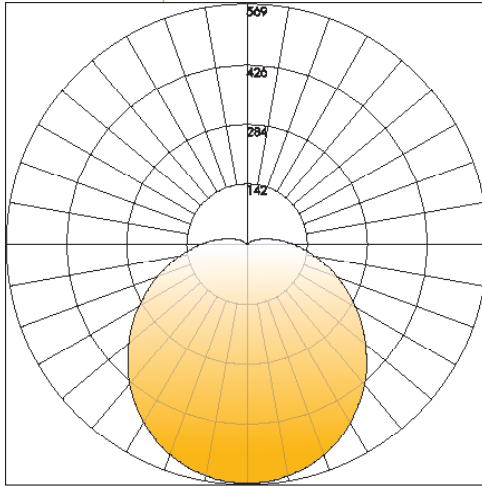

Delivered Lumens: 1,892  
 CRI: 90

Coefficients of Utilization • Effective Floor Cavity Reflectance: 20%

RCC%	80				70				50				30				10				0
RW%	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	50	30	20	0
RCR:0	118	118	118	118	115	115	115	115	108	108	108	103	103	103	97	97	97	97	97	97	95
1	106	100	95	91	103	98	93	89	92	89	85	87	84	82	83	81	78	76	76	76	76
2	96	87	79	73	92	84	77	72	80	74	69	76	71	67	72	68	65	62	62	62	62
3	87	76	67	60	84	74	65	59	70	63	57	66	61	56	63	58	54	52	52	52	52
4	79	67	57	50	77	65	56	50	62	54	48	59	52	47	56	51	46	44	44	44	44
5	73	59	50	43	70	58	49	43	55	48	42	53	46	41	50	44	40	37	37	37	37
6	67	53	44	37	65	52	43	37	50	42	36	48	41	36	46	40	35	33	33	33	33
7	62	48	39	33	60	47	39	33	45	38	32	43	37	31	42	35	31	29	29	29	29
8	58	44	35	29	56	43	35	29	41	34	29	40	33	28	38	32	28	26	26	26	26
9	54	40	32	26	52	40	32	26	38	31	26	37	30	25	35	29	25	23	23	23	23
10	51	37	29	24	49	36	29	24	35	28	23	34	27	23	33	27	23	21	21	21	21

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-30	441.04	23.3%
0-40	725.25	38.3%
0-60	1,303.97	68.9%
0-90	1,798.39	95%
90-180	93.95	5%
0-180	1,892.01	100%

**Lumen Chart:**

4' Model	HIGH	MID	LOW
2700K	3643	2787	1930
3000K	3572	2732	1892
3500K	3501	2677	1854
4000K	3393	2595	1797